

# On 1-D PDE-Based Cardiovascular Flow Bottleneck Modeling and Analysis: A Vehicular Traffic Flow-Inspired Approach

Nikolaos Bekiaris-Liberis\*

\* Department of Electrical & Computer Engineering, Technical University of Crete, Chania, Greece, 73100 (e-mail: [bekiaris-liberis@ece.tuc.gr](mailto:bekiaris-liberis@ece.tuc.gr)).

**Abstract:** We illustrate the potential of PDE-based traffic flow control in cardiovascular flow analysis, monitoring, and control, presenting a PDE-based control-oriented formulation, for 1-D blood flow dynamics in the presence of stenosis. This is achieved adopting an approach for modeling and analysis that relies on the potential correspondence of 1-D blood flow dynamics in the presence of stenosis, with 1-D traffic flow dynamics in the presence of bottleneck. We reveal such correspondence in relation to the respective (for the two flow types), speed dynamics and a (consistent with them) fundamental diagram-based reduction; bottleneck dynamic effects description and resulting boundary conditions; and free-flow/congested regimes characterization.

Copyright © 2022 The Authors. This is an open access article under the CC BY-NC-ND license (<https://creativecommons.org/licenses/by-nc-nd/4.0/>)

## 1. INTRODUCTION

Arterial stenosis, due to, for example, atherosclerotic plaque building up in arteries or in-stent restenosis, is a primary cause of human losses worldwide Chen et al. (2018). A great number of deceases, attributed to congested blood flow, currently accounting for about 50% of deaths within the European Union Quarteroni et al. (2019), could be avoided with accurate/timely detection and action implementation. This is true particularly in view of the practical feasibility that is supported by existing technologies, such as, for example, smart, stents and bypass grafts, and other implantable devices, where actuation and sensing may be performed wirelessly, via communication with a central computer; see, for example, Chen et al. (2018), Chazali et al. (2020), Kiourti & Nikita (2017), Yi et al. (2020).

Despite the technological advancement and urgent need for availability of respective advanced methodologies, illustrated by their potential in congested blood flow detection/treatment, there exists no *control-theoretic* approach tackling the formulation, analysis, monitoring, and feedback control problems of congested blood flow, in its natural, continuous in time/space, domain, in the presence of stenosis. However (and despite the domain and dimensional complexity of cardiovascular flow), there exist 1-D, second-order, hyperbolic Partial Differential Equation (PDE) systems that may effectively describe (on average) blood flow dynamics; see, e.g., Canic & Kim (2003), Formaggia et al. (2003), Li & Canic (2009), Quarteroni & Formaggia (2004), Wang (2014). Thus, such models may be utilized as basis for control-theoretic modeling, analysis, and design purposes.

In this paper we launch an effort in this direction formulating and analyzing, from a *PDE-based traffic flow control* (see, e.g., Blandin et al. (2017), Claudel & Bayen (2010), Delle Monache et al. (2017), Goatin et al. (2016), Karafyllis et al. (2019), Piacentini et al. (2020), Tumash et al. (2021a), Tumash et al. (2021b), Yu et al. (2021b), Zhang et al. (2019)) perspective, the dynamics of 1-D blood flow in the presence of stenosis. The stenosis is considered to be located at the boundary of the arterial segment considered. We present two alternative formu-

lations in which the stenosis dynamics are characterized via a static or dynamic description for the pressure drop through the stenosis. Together with utilization of a baseline dynamic model for blood flow, capturing the main transport phenomena and respective mass/momentum conservation principles, such formulation gives rise to a  $2 \times 2$  (heterodirectional; see, e.g., Auriol & Di Meglio (2020), Hu et al. (2015)) hyperbolic PDE system, with a static or dynamic boundary condition, at the outlet of the artery segment considered, respectively. As the location, geometry, and length of the potential stenosis are considered to be unknown, the derived model may incorporate unknown PDE domain length and boundary conditions parameters.

For the derived dynamic descriptions of 1-D blood flow in the presence of stenosis, we then illustrate the correspondence, of certain features, with traffic flow dynamics in the presence of bottleneck. We explore correspondence with Payne-Whitham and Aw-Rascle-Zhang-type models, in particular, in relation to speed dynamics and a consistent (with respect to reduction to conservation law equation, for instance, of Lighthill-Whitham-Richards-type) fundamental diagram. Furthermore, we illustrate the connection to respective, dynamic models of traffic flow bottlenecks. In particular, boundary blood flow stenosis may be characterized via the pressure drop at the stenosis location, while boundary traffic flow bottleneck may be described via the capacity drop at the bottleneck area. Moreover, for each type of stenosis description, we provide a consistent boundary condition at the outlet, which could either be static or dynamic, also illustrating the correspondence with the respective boundary conditions, in the case of traffic flow bottleneck. We also discuss the analogy between characterization of free-flow/congested traffic regimes and supercritical/subcritical blood flow regimes.

We start in Section 2 presenting a control-oriented model for blood flow in which arterial stenosis is described either as static or dynamic, boundary bottleneck. In Section 3 we analyze the obtained hyperbolic system, revealing the dynamic correspondence with traffic flow dynamics in the presence of bottlenecks. In Section 4 we discuss potential research directions that may emerge from the results presented.

## 2. CONTROL-THEORETIC MODELING OF STENOSIS

### 2.1 Baseline 1-D cardiovascular flow model

We consider the following  $2 \times 2$  hyperbolic system, which constitutes an 1-D approximation of cardiovascular flow dynamics (see, e.g., Formaggia et al. (2003), Quarteroni & Formaggia (2004))

$$A_t(x,t) = -A_x(x,t)V(x,t) - A(x,t)V_x(x,t) \quad (1)$$

$$V_t(x,t) = -V(x,t)V_x(x,t) - \frac{1}{\rho} \frac{\partial P(A(x,t))}{\partial x} - K_r \frac{V(x,t)}{A(x,t)} \quad (2)$$

$$A(0,t)V(0,t) = Q_{in}(t), \quad (3)$$

where  $A > 0$  is section area of artery,  $V > 0$  is average blood speed,  $\rho > 0$  is blood density,  $K_r > 0$  is friction parameter related to blood viscosity,  $t \geq 0$  is time,  $x \in [0, D]$  is spatial variable,  $D > 0$  is length of artery segment considered,  $P \in \mathbb{R}$  is pressure, which accounts for vessel wall displacement, and  $Q_{in} > 0$  is flow at the inlet of the artery segment considered (it could, for example, be described by a periodic signal, with period equal to the cardiac cycle, see, e.g., Quarteroni & Formaggia (2004)). A possible expression for the pressure function is (see, e.g., Formaggia et al. (2003), Quarteroni & Formaggia (2004))

$$P(A) = \frac{\beta}{A_0} \left( \sqrt{A} - \sqrt{A_0} \right) \quad (4)$$

$$\beta = hE\sqrt{\pi}b, \quad (5)$$

where  $A_0$  is reference arterial section area at rest,  $h > 0$  is artery wall thickness,  $E > 0$  is Young's modulus, and  $b$  is a positive parameter. One boundary condition, associated with (1), (2), is provided in (3), describing the blood flow entering the arterial segment considered. The second boundary condition is specified in the following sections since it depends both on the sign of the eigenvalues of hyperbolic system (1), (2) as well as the stenosis dynamic description adopted.

In the present setup, in which the case of a boundary bottleneck is considered, it is assumed that parameters  $\beta$  and  $A_0$ , in the pressure equation (4), are known and constant throughout the domain, which may be a reasonable requirement given that variations in geometry and mechanical properties of the artery, imposed by the stenosis, are considered to be located at the boundary  $x = D$ . Although most of modeling and analysis developments could be performed considering spatially-varying coefficients  $\beta$ ,  $A_0$ , for presentation and formulation simplicity, as well as to not distracting the reader from the main scope of the paper, which is presentation and analysis of a control-theoretic, stenosis model and its correspondence with traffic flow bottleneck model, we do not consider this case here.

### 2.2 Formulation of available measurements output equation

In the present paper we consider the case in which the pressure and flow at the inlet of the artery segment considered are measured in real time. Although such a setup may appear, at first sight, as unrealistic, current technological advancements enable the availability of these measurements. In particular, such measurements could be wirelessly transmitted to a central

computer, utilizing smart stent (or bypass graft) devices, see, for example, Chen et al. (2018), Kiourti & Nikita (2017), Yi et al. (2020). Thus, besides having available  $Q_{in}$ , a measured output is available, given by

$$y(t) = P(A(0,t)). \quad (6)$$

Since location, geometry, and material properties of the stent, in realistic scenarios, could be considered as known, it follows that  $\beta$  and  $A_0$  at  $x = 0$  are known (even in the case in which  $\beta$ ,  $A_0$  may take different values, as compared with their values for  $x \in (0, D)$ ). Thus, using (4), measurements of  $A(0,t)$  could be obtained, and hence, using (3), measurements of  $V(0,t)$ .

### 2.3 Stenosis model as static boundary bottleneck

This potential formulation of a bottleneck is derived assuming that the stenosis (e.g., due to atherosclerotic plaque building up at arterial wall Quarteroni et al. (2019) or in-stent restenosis Chen et al. (2018)) is located downstream of the inlet (i.e., the known location of a, for instance, stent device). In particular, we treat the right boundary of the arterial segment considered as the point at which the potential stenosis is located. Therefore, the spatial variable  $x$  belongs to  $[0, D]$ , where  $D$  may be unknown as the stenosis location may be unknown. The right boundary condition is derived such that it incorporates the effect of stenosis in the outlet. A schematic view of the setup considered is shown in Fig. 1.

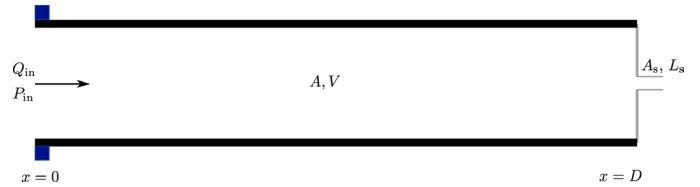


Fig. 1. Simplified schematic of an 1-D approximation of an arterial segment at rest with boundary stenosis. At the inlet of the segment considered (i.e., for  $x = 0$ ) an implantable smart stent device measures pressure and flow (i.e.,  $P_{in}$  and  $Q_{in}$ , respectively). The bottleneck location  $D$ , stenosis cross-sectional area  $A_s$ , and stenosis length  $L_s$  may be unknown.

**Modeling assumptions:** In the present setup, the domain length  $D$  and the effective section area at the stenosis location  $A_s$  may be unknown. In particular, the stenosis section area is assumed to be constant, which may be a reasonable assumption given the material and elastic properties of atherosclerotic plaque (see, for example, Takashima et al. (2007)). It is further assumed that (for constant  $A_s$ ) flow is conserved through the stenosis. Moreover, the least complex formulation of the stenosis effect (at least in terms of the number of potentially unknown model parameters) could be obtained assuming (initially zero (or, effectively, very small) length for the stenosis.

**Boundary condition formulation:** Consequently, at the stenosis location the following relation may be satisfied (Seeley & Young (1976), Young & Tsai (1973a), Young & Tsai (1973b); see also Clark (1976), Koepl et al. (2018), Stergiopoulos et al. (1992) for relevant expressions)

$$\Delta P(A(D,t), V(D,t)) = V(D,t)^2 \frac{K_s \rho}{2} \left( \frac{A(D,t)}{A_s} - 1 \right)^2, \quad (7)$$

where  $\Delta P(A(D), V(D))$  denotes the pressure drop due to the stenosis, while parameter  $K_s > 0$  is known (obtained, for example, from experimental data, see, e.g., Seeley & Young (1976)). The pressure drop denotes the pressure difference between the locations before and after the stenosis. For the former we may assume that it is given by (4), while for the latter, we may assume that it is described such that a terminal boundary condition, modeling the effect of blood flow dynamics in arteries downstream of the stenosis (see, for example, Formaggia et al. (2006), Stergiopoulos et al. (1992)), is imposed. Therefore, we may define

$$\Delta P(A(D, t), V(D, t)) = P(A(D, t)) - R_T A(D, t) V(D, t), \quad (8)$$

with  $Q_s = A(D)V(D)$  denoting the flow at the inlet of the stenosis, where  $R_T \geq 0$  denotes a total, terminal resistance. Parameter  $R_T$  may be chosen depending on the blood flow conditions modeled for a considered arterial network, and thus, it may be considered as known. Using (4), (7), (8) we obtain

$$\frac{\beta}{A_0} \left( \sqrt{A(D, t)} - \sqrt{A_0} \right) - R_T A(D, t) V(D, t) - V(D, t)^2 \frac{K_s \rho}{2} \left( \frac{A(D, t)}{A_s} - 1 \right)^2 = 0. \quad (9)$$

Equation (9) prescribes a boundary condition at  $x = D$ , associated with system (1)–(3), with  $A_s$  and  $D$  being unknown.

Although, as starting point and under the assumption of zero stenosis length, formulation (9) may appear to be adequately realistic, a more accurate, nevertheless more complex, formulation for the right boundary condition (at the inlet of the stenosis) may be obtained utilizing the following relation for the pressure drop (see, for example, Seeley & Young (1976), Young & Tsai (1973a), Young & Tsai (1973b))

$$\Delta P(A(D, t), V(D, t)) = \frac{8\pi\mu L_s}{A_s^2} A(D, t) V(D, t) + V(D, t)^2 \times \frac{K_s \rho}{2} \left( \frac{A(D, t)}{A_s} - 1 \right)^2, \quad (10)$$

where  $L_s > 0$  is unknown stenosis length and  $\mu$  is known blood viscosity coefficient. Thus, using (4), (8), (10) we obtain

$$\frac{\beta}{A_0} \left( \sqrt{A(D, t)} - \sqrt{A_0} \right) - \left( R_T + \frac{8\pi\mu L_s}{A_s^2} \right) A(D, t) \times V(D, t) - V(D, t)^2 \frac{K_s \rho}{2} \left( \frac{A(D, t)}{A_s} - 1 \right)^2 = 0. \quad (11)$$

In the case of boundary condition (11), in addition to  $A_s$  and  $D$ , the stenosis length  $L_s$  may also be an unknown parameter.

#### 2.4 Stenosis model as dynamic boundary bottleneck

Boundary condition formulations (9), (11) may be accurate for zero or, effectively, very small, stenosis length. A potentially more realistic, nevertheless more complex, model of the pressure drop dynamics, accounting for larger stenosis length (yet, much smaller than the length  $D$  of the arterial segment considered), may be written as (see, for example, Stergiopoulos et al. (1992), Young & Tsai (1973b))

$$V_t(D, t) = \frac{1}{\rho L_s} \Delta P(A(D, t), V(D, t)) - V(D, t)^2 \frac{K_s}{2L_s} \times \left( \frac{A(D, t)}{A_s} - 1 \right)^2 - \frac{8\pi\mu}{\rho A_s^2} A(D, t) V(D, t). \quad (12)$$

Employing (4), (8), relation (12) may be written as

$$V_t(D, t) = \frac{\beta}{\rho A_0 L_s} \left( \sqrt{A(D, t)} - \sqrt{A_0} \right) - \left( \frac{A(D, t)}{A_s} - 1 \right)^2 \times \frac{K_s}{2L_s} V(D, t)^2 - \left( \frac{8\pi\mu}{\rho A_s^2} + \frac{R_T}{\rho L_s} \right) A(D, t) V(D, t). \quad (13)$$

Model (1)–(3), (13) consists of a nonlinear, hyperbolic PDE - Ordinary Differential Equation (ODE) coupled system.

### 3. CARDIOVASCULAR FLOW MODEL ANALYSIS AND ITS RELATION TO TRAFFIC FLOW DYNAMICS

#### 3.1 Analysis of the hyperbolic system

*Blood flow information propagation:* In physiological conditions blood flow is reported to lie in congested (or, subcritical) regime (see, e.g., Formaggia et al. (2003), Quarteroni & Formaggia (2004)). In particular, the eigenvalues of the hyperbolic system (1), (2) are given by

$$\bar{\lambda}_1(A, V) = V + \sqrt{\frac{\beta}{2\rho A_0}} A^{\frac{1}{4}} \quad (14)$$

$$\bar{\lambda}_2(A, V) = V - \sqrt{\frac{\beta}{2\rho A_0}} A^{\frac{1}{4}}. \quad (15)$$

Since we are concerned with the case of subcritical regime we restrict our attention in a nonempty, connected open subset  $\Omega$  of the set  $\bar{\Omega} = \{(A, V) \in \mathbb{R}^2 : 0 < A, 0 < V\}$ , such that  $V < \sqrt{\frac{\beta}{2\rho A_0}} A^{\frac{1}{4}}$ , and hence,  $\bar{\lambda}_1 > 0$  and  $\bar{\lambda}_2 < 0$ , in the region of interest. System (1)–(3) is then strictly hyperbolic with distinct, real nonzero eigenvalues, as long as  $(A, V) \in \Omega$ , which implies that information propagates both forward (with blood flow) and backward (at a lower speed).

*Transformation to Riemann variables:* The Riemann variables, corresponding to system (1), (2) with eigenvalues (14), (15), are

$$u(A, V) = V + 2\sqrt{\frac{2\beta}{\rho A_0}} A^{\frac{1}{4}}, \quad v(A, V) = V - 2\sqrt{\frac{2\beta}{\rho A_0}} A^{\frac{1}{4}}. \quad (16)$$

The inverse transformations that correspond to (16) are

$$V(u, v) = \frac{1}{2}(u + v), \quad A(u, v) = \frac{\rho^2 A_0^2}{4^{\frac{5}{2}} \beta^2} (u - v)^4. \quad (17)$$

In the new variables, system (1), (2) is written as

$$u_t(x, t) = -\lambda_1(u(x, t), v(x, t)) u_x(x, t) + f_1(u(x, t), v(x, t)) \quad (18)$$

$$v_t(x, t) = -\lambda_2(u(x, t), v(x, t)) v_x(x, t) + f_1(u(x, t), v(x, t)) \quad (19)$$

$$f_1(u, v) = -\frac{4^{\frac{9}{2}} K_r \beta^2}{\rho^2 A_0^2} \frac{u + v}{(u - v)^4} \quad (20)$$

$$\lambda_1(u, v) = \frac{5u + 3v}{8}, \quad \lambda_2(u, v) = \frac{3u + 5v}{8}. \quad (21)$$

Boundary condition (3) at the inlet is expressed in terms of the Riemann variables as

$$\frac{\rho^2 A_0^2}{4^{\frac{11}{2}} \beta^2} (u(0,t) + v(0,t))(u(0,t) - v(0,t))^4 = Q_{in}(t). \quad (22)$$

Together with (18)–(22) we associate a boundary condition at  $x = D$ , which may be specified as follows.

*Boundary condition at the outlet:* Since hyperbolic system (18), (19) is heterodirectional, together with boundary condition (22) at  $x = 0$ , one should specify a boundary condition at  $x = D$ . There are different options for specifying a boundary condition at  $x = D$ , also depending on the coupling type, of the arterial segment considered, with different arteries (also considering different types of arteries; see, e.g., Formaggia et al. (2006), Koepl et al. (2018), Quarteroni & Formaggia (2004)).

Since in the present paper we are concentrated on the modeling of bottleneck effects, the boundary condition is specified in order to describe the pressure difference between the locations before and after the bottleneck, also accounting for a cumulative effect of arteries downstream of the stenosis area. This could be achieved employing a static (see Section 2.3) or dynamic (see Section 2.4) description for the effect of the stenosis.

1) In the case of static bottleneck, the boundary condition at  $x = D$  is specified in order to describe the pressure drop at the outlet of the arterial segment considered, where a stenosis is located, as described in Section 2.3. Using (11), the right boundary condition is expressed in Riemann variables as

$$0 = G(u(D,t), v(D,t)) \quad (23)$$

$$G(u, v) = \rho(u - v)^2 - \frac{32\beta}{\sqrt{A_0}} - d_1(u - v)^4(u + v) - 4K_s \rho(u + v)^2(d_2(u - v)^4 - 1)^2 \quad (24)$$

$$d_1 = \left( R_T + \frac{8\pi\mu L_s}{A_s^2} \right) \frac{\rho^2 A_0^2}{\beta^2 4^3}, \quad d_2 = \frac{\rho^2 A_0^2}{4^5 \beta^2 A_s}. \quad (25)$$

2) In the dynamic bottleneck case, the right boundary condition is expressed in Riemann variables using (13), (17) as

$$v(D,t) = 2X(t) - u(D,t) \quad (26)$$

$$\dot{X}(t) = \frac{1}{32\rho L_s} G(u(D,t), 2X(t) - u(D,t)). \quad (27)$$

Well-posedness of the  $2 \times 2$  hyperbolic PDE system (18)–(22) with the dynamic boundary condition (26), (27) (with (24)), or the static boundary condition (23) (with (24)) may be guaranteed utilizing, for example, the results in Bastin & Coron (2016), Li (1994). To be able to employ such results, certain assumptions are required to be imposed on regularity, size, and compatibility (with boundary conditions) of initial conditions, on size and regularity of flow  $Q_{in}$  at the inlet, and on the values of parameters  $\beta$ ,  $A_0$ ,  $K_s$ ,  $\rho$ ,  $L_s$ ,  $\mu$ ,  $R_T$ ,  $A_s$ . Well-posedness of the hyperbolic system considered, for realistic values of the various parameters involved, is also consistent with the dynamic behavior of the actual, physical system (see, for example, Canic & Kim (2003), Quarteroni & Formaggia (2004)). Although important, we do not belabor this issue as it is beyond the present paper’s primary scope.

### 3.2 Properties of the model from a traffic flow perspective

1) The first correspondence with second-order traffic flow models originates in speed equation (2). Such relation (for  $K_r = 0$ ) may be compared to speed dynamics of Payne-Whitham traffic flow model (see, e.g., Treiber & Kesting (2013)) with pressure given by (4). Equation (1), which expresses conservation of blood volume entering and exiting an artery segment considered, corresponds to conservation of the number of vehicles entering and exiting a given highway segment.

2) The correspondence of model (1), (2) to traffic flow models of Payne-Whitham (and Aw-Rascle-Zhang, see, e.g., Fan et al. (2014), Lebacque et al. (2007), Treiber & Kesting (2013)) type could be also viewed via a fundamental diagram definition, considering the pressure function (4), which could be explained as follows. Adopting the procedure in Zhang (2002) for derivation of a fundamental diagram relation from the speed equation (2), we define  $V = F(A)$  and substitute this relation into (2) in order to obtain only one, conservation law equation of the form (1), i.e., of the form  $A_t + (F(A)A)_x = 0$ , where  $F$  is to be determined. With  $K_r = 0$  we get that

$$F'(A) \left( A_t + F(A)A_x + \frac{\beta}{2\rho A_0 \sqrt{AF'(A)}} A_x \right) = 0. \quad (28)$$

Imposing the reasonable requirement that  $F'(A) < 0$ , for all  $A > 0$ , relation (28) holds if the following equation is satisfied

$$A_t + F(A)A_x + \frac{\beta}{2\rho A_0 \sqrt{AF'(A)}} A_x = 0. \quad (29)$$

Therefore, in order for equation (29) to reduce to the conservation law equation (1), imposing  $V = F(A)$ , for any  $A$ , the following should hold

$$F'(A)^2 = \frac{\beta}{2\rho A_0} A^{-\frac{3}{2}}. \quad (30)$$

Therefore, since  $F'(A) < 0$ , for any  $A > 0$ , we get that

$$F(A) = F(0) - 2\sqrt{\frac{2\beta}{\rho A_0}} A^{\frac{1}{4}}. \quad (31)$$

The constant  $F(0)$  may be viewed as the speed at a limiting case in which the section area tends to zero. Thus, in practice, it may be defined, for example, through considering a maximum possible, blood transport speed, which could be obtained empirically. Relation (31) defines a fundamental diagram (see, e.g., Treiber & Kesting (2013)), satisfying the required conditions. In particular, function  $\bar{Q}(A) = AF(A) = A \left( F(0) - 2\sqrt{\frac{2\beta}{\rho A_0}} A^{\frac{1}{4}} \right)$ , for  $A \in [0, A_1]$ , where  $A_1 = \frac{F(0)^4 \rho^2 A_0^2}{\beta^2 4^3}$ , satisfies  $\bar{Q}(0) = \bar{Q}(A_1) = 0$ , while being strictly concave.

We note here that the limiting case in which  $V = F(A)$ , constitutes a considerable simplification, which may appear, at first sight, as not realistic for cardiovascular systems. However, such a reduction may be useful in, for example, studying the dynamic effect of a bottleneck in blood flow, at a vicinity upstream of the stenosis, employing only the respective conservation equation.

3) The two different bottleneck descriptions also bear a resemblance to traffic flow bottleneck descriptions. For example, boundary bottlenecks may appear due to lane-drops or, in gen-

eral, due to the presence of locations of reduced capacity, at the end of a controlled area of interest, such as, for example, where a tunnel or an area of high curvature begins (see, e.g., Wang et al. (2014)). A boundary bottleneck could be described through properly modeling the traffic capacity drop at the bottleneck location (potentially also employing different fundamental diagram relations for the traffic speed immediately before and after the bottleneck location; see, e.g., Treiber & Kesting (2013), Yu et al. (2021b)); corresponding to the static equation (7) (or (10)), which describes the pressure drop at the area of the stenosis (that may also be viewed as defining a pressure fundamental diagram at the stenosis, depending on the pressure immediately before, as  $P_s(A, V) = P(A) - V^2 \frac{K_s \rho}{2} \left( \frac{A}{A_s} - 1 \right)^2$ , which becomes a function of only  $A$  when  $V = F(A)$ ).

In the case of a dynamic bottleneck description, speed (or flow) dynamics at the area of the stenosis are described by an ODE (as in (13), (27); see also, e.g., Stergiopoulos et al. (1992), Young & Tsai (1973b)), dictated by the pressure difference between the areas at the inlet and outlet of the stenosis. This may be viewed as corresponding to the case of dynamic description of traffic density at a bottleneck area through an ODE, dictated by the flow difference between the flow arriving and exiting the bottleneck area (see, e.g., Bekiaris-Liberis & Krstic (2018), Wang et al. (2014)). In both cases the resulting dynamic description consists of a nonlinear, hyperbolic PDE-ODE coupled system.

4) For cardiovascular flow, subcritical regime is characterized by the sign of  $\bar{\lambda}_2$  in (15). Analogously, traffic congestion may be characterized by negative sign of a respective eigenvalue that corresponds to the Reimann invariant transporting opposite to traffic flow (see, e.g., Belletti et al. (2015)). One difference lies in that physiological conditions for cardiovascular flow correspond to subcritical (congested) regime (where  $\bar{\lambda}_2 < 0$ ; see, e.g., Formaggia et al. (2003), Quarteroni & Formaggia (2004)), whereas for traffic flow, physiological conditions may be considered as corresponding to the free-flow (supercritical) regime (where  $\bar{\lambda}_2 > 0$ ; see also, e.g., Belletti et al. (2015)).

#### 4. FUTURE PERSPECTIVES

The arterial stenosis models presented and the correspondence with vehicular traffic flow bottleneck models, may constitute the starting point for PDE-based, control-theoretic developments for cardiovascular flow stenosis analysis, estimation, and control, inspired by respective traffic flow techniques.

A first research direction, of practical and theoretical significance, would be to develop algorithms for real-time identification of potential stenosis location and characteristics (such as, e.g., length and thickness). Towards this end, a possible approach would be to design adaptive observers, utilizing the  $2 \times 2$  hyperbolic system (18), (19), (22) with either (23) or (26), (27), aiming at simultaneous state estimation and parameters identification, employing the derived model and the available boundary measurements. Related methods for traffic flow models and general hyperbolic systems could be found, for example, in Anfinsen & Aamo (2019), Bin & Di Meglio (2017), Seo et al. (2017), Wang & Krstic (2021), Yu et al. (2021a).

Another potential research direction would be to consider the feedback control problem of blood flow at areas with stenosis. Towards this end, perhaps a crucial issue would be to specify how, in practice, the required actuation could be per-

formed. One possibility would be to consider boundary actuation, manipulating the inflow in (22) through certain microelectromechanical systems (for example, smart stent devices, actuated wirelessly; see, e.g., Chazali et al. (2020), Yi et al. (2020)), thus resulting in a boundary control problem for system (18), (19), (22) with either (23) or (26), (27). An alternative possibility would be to consider in-domain actuation enabled through automated drug delivery systems (see, e.g., Chazali et al. (2020), Kulkarni et al. (2020)). Such an approach could build upon an extension of the presented model to incorporate in-domain actuation, in correspondence with automated vehicles-based actuation incorporation in vehicular traffic (see, for example, Bekiaris-Liberis & Delis (2021), Darbha & Rajagopal (1999), Karafyllis et al. (2021), Piacentini et al. (2020), Yi & Horowitz (2006)).

#### ACKNOWLEDGMENTS

The research project was supported by the Hellenic Foundation for Research and Innovation (H.F.R.I.) under the “2nd Call for H.F.R.I. Research Projects to support Faculty Members & Researchers” (Project Number: 3537/ORAMA).

The author would like to thank Prof. Argiris Delis and Prof. Ioannis Nikolos for fruitful discussions.

#### REFERENCES

- Anfinsen, H. and Aamo, O.M. (2019). *Adaptive Control of Hyperbolic PDEs*. Springer.
- Auriol, J. and Di Meglio, F. (2020). Robust output feedback stabilization for two heterodirectional linear coupled hyperbolic PDEs. *Automatica*, 115, paper no. 108896.
- Bastin, G. and Coron, J.-M. (2016). *Stability and Boundary Stabilization of 1-D Hyperbolic Systems*, Birkhauser.
- Bekiaris-Liberis, N. and Delis, A. (2021). PDE-based feedback control of freeway traffic flow via time-gap manipulation of ACC-equipped vehicles. *IEEE Trans. on Control Systems Technology*, 29, 461–469.
- Bekiaris-Liberis, N. and Krstic, M. (2018). Compensation of actuator dynamics governed by quasilinear hyperbolic PDEs. *Automatica*, 92, 29–40.
- Belletti, F., Huo, M., Litrico, X., and Bayen, A.M. (2015). Prediction of traffic convective instability with spectral analysis of the Aw-Rascle-Zhang model. *Physics Letters A*, 379, 2319–2330.
- Bin, M. and Di Meglio, F. (2017). Boundary estimation of boundary parameters for linear hyperbolic PDEs. *IEEE Transactions on Automatic Control*, 62, 3890–3904.
- Blandin, S., Litrico, X., Delle Monache, M.L., Piccoli, B., and Bayen, A.M. (2017). Regularity and Lyapunov stabilization of weak entropy solutions to scalar conservation laws. *IEEE Trans. Autom. Control*, 62, 1620–1635.
- Canic, S. and Kim, E.H. (2003). Mathematical analysis of the quasilinear effects in a hyperbolic model blood flow through compliant axi-symmetric vessels. *Mathematical Methods in the Applied Sciences*, 26, 1161–1186.
- Chazali, F.A.M., Hasan, M.N., Rehman, T., Nafea, M., Ali, M.S.M., Takahata, K. (2020). MEMS actuators for biomedical applications: A review. *J. Micromechanics & Microengineering*, 30, paper no. 073001.
- Chen, X., Assadsangabi, B., Hsiang, Y., Takahata, K. (2018). Enabling angioplasty-ready “smart” stents to detect in-stent restenosis and occlusion. *Adv. Science*, 5, paper no. 1700560.

- Clark, C. (1976). The fluid mechanics of aortic stenosis—I. Theory and steady flow experiments. *Journal of Biomechanics*, 9, 521–528.
- Claudel, C. and Bayen, A.M. (2010). Lax-Hopf based incorporation of internal boundary conditions into Hamilton-Jacobi equation—Part I: Theory. *IEEE Trans. Autom. Control*, 55, 1142–1157.
- Darbha, S. and Rajagopal, K.R. (1999). Intelligent cruise control systems and traffic flow stability. *Transp. Res. C, Emerg. Technol.*, 7, 329–352.
- Delle Monache, M.L., Piccoli, B., and Rossi, F. (2017). Traffic regulation via controlled speed limit. *SIAM Journal on Control and Optimization*, 55, 2936–2958.
- Fan, S., Herty, M., Seibold, B. (2014). Comparative model accuracy of a data-fitted generalized Aw-Rascle-Zhang model. *Networks and Heterogenous Media*, 9, 239–268.
- Formaggia, L., Lamponi, D., and Quarteroni, A. (2003). One dimensional models for blood flow in arteries. *Journal of Engineering Mathematics*, 47, 251–276.
- Formaggia, L., Lamponi, D., Tuveri, M., and Veneziani, A. (2006). Numerical modeling of 1D arterial networks coupled with a lumped parameters description of the heart. *Computer Methods in Biomech. and Biomedical Engineer.*, 9, 273–288.
- Goatin, P., Gottlich, S., and Kolb, O. (2016). Speed limit and ramp meter control for traffic flow networks. *Eng. Optim.*, 48, 1121–1144.
- Hu, L., Di Meglio, F., Vazquez, R., and Krstic, M. (2015). Control of homodirectional and general heterodirectional linear coupled hyperbolic PDEs. *IEEE Transactions on Automatic Control*, 61, 3301–3314.
- Karafyllis, I., Bekiaris-Liberis, N., Papageorgiou, M. (2019). Feedback control of nonlinear hyperbolic PDE systems inspired by traffic flow models. *IEEE Trans. on Automatic Control*, 64, 3647–3662.
- Karafyllis, I., Theodosis, D., and Papageorgiou, M. (2021). Analysis and control of a non-local PDE traffic flow model. *International Journal of Control*, to appear.
- Kiourtis, A. and Nikita, K.S. (2017). A review of in-body biotelemetry devices: Implantables, ingestibles, and injectables,” *IEEE Trans. on Biomedical Engin.*, 64, 1422–1430.
- Koepl, T., Santin, G., Haasdonk, B., and Helmig, R. (2018). Numerical modelling of a peripheral arterial stenosis using dimensionally reduced models and kernel methods. *Numerical Methods in Biomed. Engineering*, 34, paper no. e3095.
- Kulkarni, P., Rawtani, D., Kumar, M., and Rameshwarji Lahoti, S. (2020). Cardiovascular drug delivery: A review on the recent advancements in nanocarrier based drug delivery with a brief emphasis on the novel use of magnetoliposomes and extracellular vesicles and ongoing clinical trial research. *J. of Drug Delivery Science & Technology*, 60, paper no. 102029.
- Lebacque, J.-P., Mammari, S., and Haj-Salem, H. (2007). The Aw-Rascle and Zhangs model: Vacuum problems, existence and regularity of the solutions of the Riemann problem. *Transp. Res. Part B: Methodological*, 41, 710–721.
- Li, T., Canic, S. (2009). Critical thresholds in a quasilinear hyperbolic model of blood flow. *Networks & Heterogen. Media*, 4, 527–536.
- Li, T.-T. (1994). *Global Classical Solutions for Quasilinear Hyperbolic Systems*, Wiley-Mason.
- Piacentini, G., Goatin, P., Ferrara, A. (2020). Traffic control via platoons of intelligent vehicles for saving fuel consumption in freeway systems. *IEEE Control Syst. Letters*, 5, 593–598.
- Quarteroni, A., Dede, L., Manzoni, A., and Vergara, C. (2019). *Mathematical Modelling of the Human Cardiovascular System: Data, Numerical Approximation, Clinical Applications*, Cambridge University Press.
- Quarteroni, A., Formaggia, L. (2004). Mathematical modelling and numerical simulation of the cardiovascular system. In Ayache, N. (ed.), *Handb. of Num. Analysis*, 3–127, Elsevier.
- Seeley, B.D. and Young, D.F. (1976). Effect of geometry on pressure losses across models of arterial stenoses. *Journal of Biomechanics*, 9, 439–448.
- Seo, T., Bayen, A.M., Kusakabe, T., and Asakura, Y. (2017). Traffic state estimation on highway: A comprehensive survey. *Annual Reviews in Control*, 43, 128–151.
- Stergiopoulos, N., Young, D.F., and Rogge, T.R. (1992). Computer simulation of arterial flow with applications to arterial and aortic stenosis. *Journal of Biomechanics*, 25, 1477–1488.
- Takashima, K., Kitou, T., Mori, K., and Ikeuchi, K. (2007). Simulation and experimental observation of contact conditions between stents and artery models. *Medical Engineering & Physics*, 29, 326–335.
- Treiber, M. and Kesting, A. (2013). *Traffic Flow Dynamics: Data, Models and Simulation*, Springer-Verlag, Berlin.
- Tumash, L., Canudas de Wit, C., and Delle Monache, M.L. (2021). Boundary control design for traffic with nonlinear dynamics. *IEEE Trans. on Automatic Control*, to appear.
- Tumash, L., Canudas de Wit, C., and Delle Monache, M.L. (2021). Boundary control for multi-directional traffic on urban networks. *IEEE Conf. on Decision & Contr.*, Austin, TX.
- Wang, X. (2014). *1D Modeling of Blood Flow in Networks: Numerical Computing and Applications*, PhD Thesis, Univ. Pierre and Marie Curie.
- Wang, Y., Kosmatopoulos, E.B., Papageorgiou, M., and Papanichail, I. (2014). Local ramp metering in the presence of a distant downstream bottleneck: Theoretical analysis and simulation study. *IEEE Transactions on Intelligent Transportation Systems*, 15, 2024–2039.
- Wang, J. and Krstic, M. (2021). Regulation-triggered adaptive control of hyperbolic PDE-ODE model with boundary interconnections. *International J. of Adaptive Control & Signal Processing*, 35, 1513–1543.
- Yi, Y., Chen, J., and Takahata, K. (2020). Wirelessly powered resonant-heating stent system: Design, prototyping, and optimization. *IEEE Trans. Antennas & Propagat.*, 68, 482–490.
- Yi, J. and Horowitz, R. (2006). Macroscopic traffic flow propagation stability for adaptive cruise controlled vehicles. *Transp. Res. C, Emerg. Technol.*, 14, 81–95.
- Young, D.F., Tsai, F.Y. (1973). Flow characteristics in models of arterial stenoses—I. Steady flow. *J. Biomech.*, 6, 395–410.
- Young, D.F. and Tsai, F.Y. (1973). Flow characteristics in models of arterial stenoses—II. Unsteady flow. *Journal of Biomechanics*, 6, 547–559.
- Yu, H., Gan, Q.-J., Bayen, A.M. and Krstic, M. (2021). PDE traffic observer validated on freeway data. *IEEE Transactions on Control Systems Technology*, 29, 1048–1060.
- Yu, H., Koga, S., Oliveira, T.R., Krstic, M. (2021). Extremum seeking for traffic congestion control with a downstream bottleneck. *ASME J. of Dynamic Systems, Measur., and Control*, 143, paper no. 031007.
- Zhang, H.M. (2002). A non-equilibrium traffic model devoid of gas-like behavior. *Transp. Research Part B*, 36, 275–290.
- Zhang, L., Prieur, C., and Qiao, J. (2019). PI boundary control of linear hyperbolic balance laws with stabilization of ARZ traffic flow models. *Systems and Control Letters*, 123, 85–91.